

CAN-R6

CANx 6 x 10 A Relays, manual control buttons

CAN-R6 is a DIN-rail mounted 6-channel relay module designed for switching of AC/DC loads.

Physical interfaces

Relays	6
Relay current	10 A on 230V AC; 5 A on 30V DC
Relay control button	6
CAN FT	1
Programming / Reset button	1
USB 2.0	1 (only for device firmware upgrade)

Power

Power supply	24 V DC
Power consumption	0.29 W (stand-by), 1.8 W (max)

Connections

CANx bus	Bus connection terminal, 0.8 mm ²
Power supply and relays	Screw terminals, 0.8 mm ² .. 1.5 mm ²

LED indicators

Green	Bus activity / programming mode
Red	Bus or hardware fault / reset

Enclosure

Mounting support	DIN rail
DIN module width	4
Dimensions WxHxD	72 x 102 x 61 mm
IP degree of protection	IP20
Net weight	160 g

Standards compliance


EMC	EN61000-6-1; EN61000-6-3
-----	--------------------------

Environment

Operational temperature	0 °C .. +45 °C
Storage temperature	-15 °C .. +55 °C
Relative humidity	0% ... 93% (without condensation)

Warranty

2 years

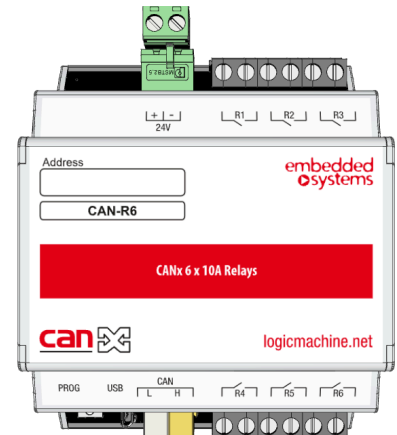

Key highlights

Robust and efficient communication
Utilizes time-proven CAN FT field bus.

High bandwidth CAN FT bus
Supports 48Kbps over CAN FT bus, ensuring fast and reliable data transfer.

LoRa-enabled variants
Selected CANx devices offer LoRa 433 wireless communication for flexibility.

Seamless protocol interoperability *
Unified data types enable smooth integration with other systems such as KNX, Modbus, BACnet, MQTT, and more.

Co-exists with KNX while enhancing performance *
Eliminates KNX fieldbus limitations (speed, semantics) while maintaining full user experience and compatibility with KNX.

ETS-friendly integration *
Supports importing KNX project files and enriching them with semantics for advanced data modelling.

Comprehensive commissioning *
Free CANx and DALI web-based commissioning tools available via the LogicMachine app store for device discovery, configuration and diagnostics.

** LogicMachine is required for commissioning and interconnectivity with other protocols.*

logicmachine.net