

# CAN-R4

## CANx 4 x 10 A Relays, manual control buttons

CAN-R4 is a DIN-rail mounted 4-channel relay module designed for switching of AC/DC loads.

### Physical interfaces

Relays	4
Relay current	10 A
Relay control button	4
CAN FT	1
Programming / Reset button	1
USB 2.0	1 (only for device firmware upgrade)

### Power

Power supply	24 V DC
Power consumption	0.26 W (stand-by), 1.7 W (max)

### Connections

CANx bus	Bus connection terminal, 0.8 mm <sup>2</sup>
Power supply and relays	Screw terminals, 0.8 mm <sup>2</sup> .. 1.5 mm <sup>2</sup>

### LED indicators

Green	Bus activity / programming mode
Red	Bus or hardware fault / reset

### Enclosure

Mounting support	DIN rail
DIN module width	4
Dimensions WxHxD	72 x 102 x 61 mm
IP degree of protection	IP20
Net weight	146 g

### Standards compliance


EMC	EN61000-6-1; EN61000-6-3
-----	--------------------------

### Environment

Operational temperature	0 °C .. +45 °C
Storage temperature	-15 °C .. +55 °C
Relative humidity	0% ... 93% (without condensation)

### Warranty

2 years

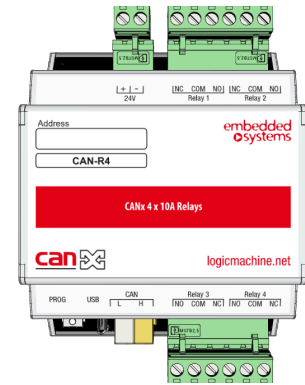

### Key highlights

#### Robust and efficient communication

Utilizes time-proven CAN FT field bus.

#### High bandwidth CAN FT bus

Supports 48Kbps over CAN FT bus, ensuring fast and reliable data transfer.

#### LoRa-enabled variants

Selected CANx devices offer LoRa 433 wireless communication for flexibility.

#### Seamless protocol interoperability \*

Unified data types enable smooth integration with other systems such as KNX, Modbus, BACnet, MQTT, and more.

#### Co-exists with KNX while enhancing performance \*

Eliminates KNX fieldbus limitations (speed, semantics) while maintaining full user experience and compatibility with KNX.

#### ETS-friendly integration \*

Supports importing KNX project files and enriching them with semantics for advanced data modelling.

#### Comprehensive commissioning \*

Free CANx and DALI web-based commissioning tools available via the LogicMachine app store for device discovery, configuration and diagnostics.

*\* LogicMachine is required for commissioning and interconnectivity with other protocols.*

[logicmachine.net](http://logicmachine.net)